


アメリカ・イギリス  
フランス・ドイツ特許  
意匠登録済

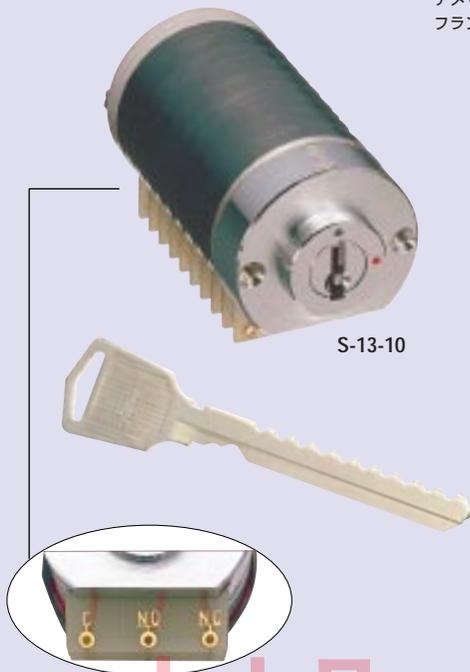

S-13-10

裏面端子部

**特徴** 4段型8通りから10段型512通りもの回路構成  
鍵が完全に回せない場合作動しません。  
2接点型なのでON / OFFの確認が確実




**仕様** 製品自重：下記表による。  
材 質：鍍前 / 快削黄銅棒 (C3604BD)  
表面仕上：鍍前 / クロムめっき (MBCr)

**用途** 各種コンピュータ・ECR・警報装置・在庫管理機器

**納期** お問合せ下さい。

**スイッチ特性** 定 格：DC5V・25mA  
初期接触抵抗：30mΩ以下 (DC5V・25mA)  
プリント板導体抵抗：200mΩ以下 (DC5V・25mA)  
絶縁抵抗：100MΩ以上 (DC500Vメガにて)  
耐 電 圧：AC1000V (1分間)  
耐 久 性：機械的・電氣的3万回以上  
切替接点：1回路2接点型

パネル穴明け寸法

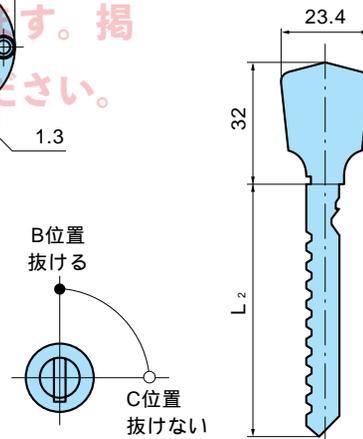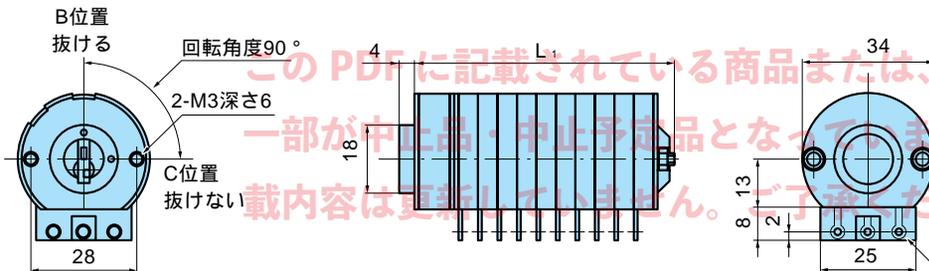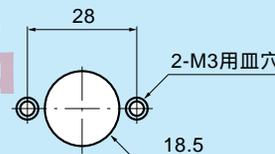

注1)C位置におけるスイッチの状態は鍵の刻印番号に対応する2進数です。詳細は最寄りの支店にお問合せ下さい。


### スイッチ組合せ数

| 商品番号    | 組合せ数  | L1 | L2 | 製品自重(g) | コード | 価 格 |
|---------|-------|----|----|---------|-----|-----|
| S-13-4  | 8通り   | 35 | 36 | 122     |     |     |
| S-13-5  | 16通り  | 41 | 41 | 126     |     |     |
| S-13-6  | 32通り  | 46 | 46 | 128     |     |     |
| S-13-7  | 64通り  | 51 | 51 | 134     |     |     |
| S-13-8  | 128通り | 56 | 56 | 142     |     |     |
| S-13-9  | 256通り | 61 | 61 | 148     |     |     |
| S-13-10 | 512通り | 66 | 66 | 154     |     |     |
| S-13-K  |       |    |    |         |     |     |

### 鍵の刻印番号と信号の対応(例)

| 鍵の刻印番号  | S-13-10のC位置におけるスイッチの状態 |     |     |     |     |     |     |     |     |      |
|---------|------------------------|-----|-----|-----|-----|-----|-----|-----|-----|------|
|         | SW1                    | SW2 | SW3 | SW4 | SW5 | SW6 | SW7 | SW8 | SW9 | SW10 |
| A 0 0 0 | OFF                    | OFF | OFF | OFF | OFF | OFF | OFF | OFF | OFF | ON   |
| A 0 0 1 | ON                     | OFF | ON   |
| A 0 0 2 | OFF                    | ON  | OFF | ON   |
| A 0 0 3 | ON                     | ON  | OFF | ON   |
| A 0 0 4 | OFF                    | OFF | ON  | OFF | OFF | OFF | OFF | OFF | OFF | ON   |
| A 0 0 5 | ON                     | OFF | ON  | OFF | OFF | OFF | OFF | OFF | OFF | ON   |
| A 0 0 6 | OFF                    | ON  | ON  | OFF | OFF | OFF | OFF | OFF | OFF | ON   |
| A 0 0 7 | ON                     | ON  | ON  | OFF | OFF | OFF | OFF | OFF | OFF | ON   |
| A 0 0 8 | OFF                    | OFF | OFF | ON  | OFF | OFF | OFF | OFF | OFF | ON   |
| A 0 0 9 | ON                     | OFF | OFF | ON  | OFF | OFF | OFF | OFF | OFF | ON   |
| }       | 中 略                    |     |     |     |     |     |     |     |     |      |
| A 5 1 1 | ON                     | ON  | ON  | ON  | ON  | ON  | ON  | ON  | ON  | ON   |

### スイッチは下記のとおり(4段型)

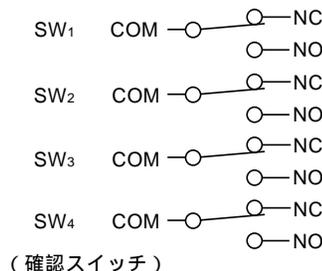

中止品・中止予定品

TAKIGEN