AP-2 プラスチック製 A-2 亜鉛合金製

RoHS 10 カラバリ

取手1型
PULLS TYPE I

A-2

AP-2-Black
ブラック

AP-2-Gray
グレー

AP-2-Ivory
アイボリー



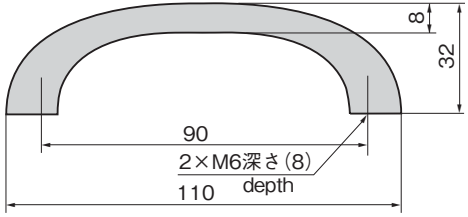

商品番号 Product No.	製品質量(g) Mass	使用荷重 N Working load
A-2	73	392
AP-2	17	245

商品番号 Product No.	RoHS 10	コード Code
A-2	●	00002
AP-2-Black	●	00003
AP-2-Gray	●	00004
AP-2-Ivory	●	00005

●:RoHS10指令対応品
▲:RoHS10指令に対応可能です。

特徴 Feature

- 取付け用ねじ穴は黄銅製インサート金具使用
- Brass-made insertion fittings are used for screw holes.

仕様	● 材　　質:AP-2／PC+ABS樹脂 A-2／亜鉛合金(ZDC) ● 表面仕上:A-2／クロムめっき(MZCr) ● 標 準 色:ブラック・グレー・アイボリー(AP-2) ● 特 注 色:ブルー・イエロー(AP-2)
用途	● 計測機器・通信機器
納期	● 標準在庫品
備考 ⚠	● 本製品は非結晶性樹脂材を使用していて緩み防止剤に対して適合しないため、ご使用は避けてください。(一部緩み防止剤の注意事項にも記載されております。) ● 常温でご使用ください。(AP-2) ● ねじ締付トルク推奨値:2.6N・m ● 緩み防止剤など、溶剤を使用する際は十分に検証を行ってください。(AP-2)

Specifications	● Material: AP-2: PC+ABS resin A-2: Zinc alloy (ZDC) ● Finish: A-2: Chrome plating (MZCr) ● Standard color: Black, gray, ivory (AP-2) ● Custom-made color: Blue, yellow (AP-2)
Specific use	● Measuring or communication equipment
Remarks ⚠	● This product uses noncrystalline resin. It is not suitable for thread-locking fluid so use should be avoided. (Also noted in the precautions of some types of thread-locking fluid.) ● Use the product in normal temperatures.(AP-2) ● Recommended screw tightening torque: 2.6N・m ● Be sure to test adequately when using a solvent such as thread-locking fluid. (AP-2)