

シリンダー錠I型
CAM LOCKS I TYPE

特徴 Feature

- 鍵は90°回転で施錠時・解錠時ともに抜きできます。
- Key can be inserted/removed by turning 90° both when locking and unlocking.

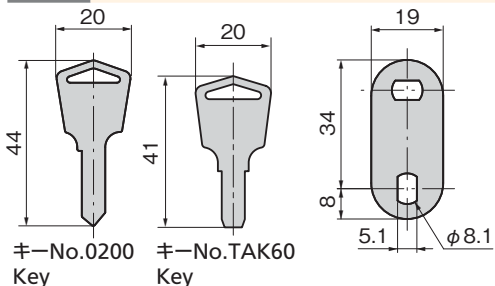
仕様	● 材 質: 本体/亜鉛合金 (ZDC) キー/黄銅板 (C3713P)
	● 表面仕上: 本体/クロムめっき (MZCr) キー/ニッケルめっき (MBNi)
用途	● 付 属 品: キー2本・止め金
	● 自動販売機・屋外用分電盤・小型防犯機器・都市ガス警報器
納期	● 標準在庫品
	● 鍵違いも製作します。お問合せください。
備考	● M19締付け推奨トルク: 6.86N・m
	● 厚み4mmのリングを取外しても使用できます。止め金取付け位置は14mm→18mmになります。



C-34-TAK60



C-34-C-TAK60

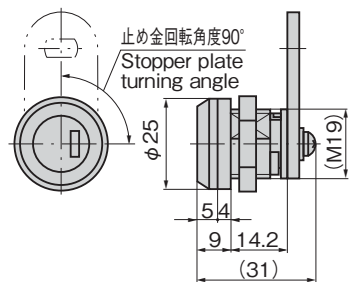
キーNo. TAK60
KeyキーNo. 0200
Key板厚t=3.2
Plate thickness

●: RoHS10指令対応品 ▲: RoHS10指令に対応可能です。


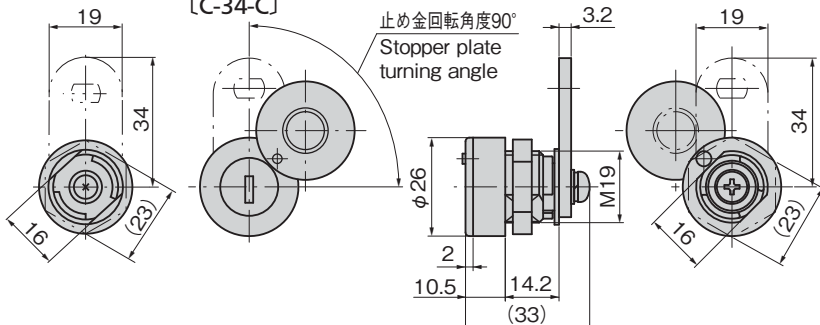
Specifi- cations	● Material: Main body: Zinc alloy (ZDC) Key: Brass plate (C3713P)
	● Finish: Main body: Chrome plating (MZCr) Key: Nickel plating (MBNi)
Specifi- c-use	● Accessories: Two keys and stopper plate
	● Vending machines, outdoor distribution boards, small burglarproof equipment and city gas alarms
Remarks	● Recommended M19 tightening torque: 6.86N・m
	● Can also be used with 4mm-thickness ring removed. Mounting position of stopper plate changes 14mm→18mm.

商品番号 Product No.	RoHS 10	製品質量 (g) Mass	コード Code
C-34-TAK60	●	66	23681
C-34	●		20268
C-34-C-TAK60	●		23682
C-34-C	●		23615

[C-34]



[C-34-C]

パネル穴明け寸法
Panel drilling dimensions