B-1063 ステンレス製 / B-63 鉄製

RoHS10 SUS ステンレス

重量用裏蝶番
CONCEALED HINGES FOR HEAVY-DUTY USE

B-1063-1

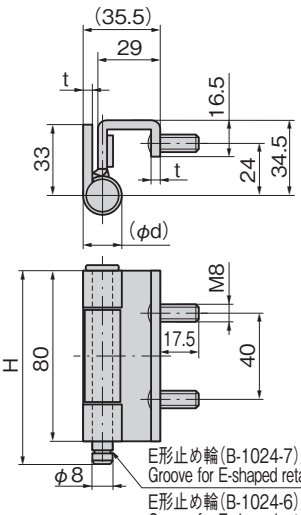

作動図 Operation drawing



商品番号 Product No.	RoHS10	H	t	(d)	製品質量(g) Mass	コード Code
B-1063-1	●	87	4	16.5	375	10662
B-63-1	●	86	4.5	17.5		10159

●:RoHS10指令対応品　▲:RoHS10指令に対応可能です。

特徴 Feature

- 筐体側のヒンジにクッションが付いています。
- Hinge on the case side has cushion.

仕様	● 材　質: B-1063-1／ステンレス鋼板(SUS304) B-63-1／熱間圧延鋼板(SPHC) ● 表面仕上: B-1063-1／生地 B-63-1／亜鉛めっきクロメート処理(MFZn-C) ● 縦2ヶ使用時参考扉質量:50kg
用途	● 大型配電盤・キュービクル・制御盤
納期	● 標準在庫品
備考	● E形止め輪は付属されておりません。 ● 適合するE形止め輪は図内に記載しております。 B-1024(760ページ)をご参照ください。 ● 取付け参考例は716ページをご参照ください。

Specifications	● Material: B-1063-1: Stainless steel plate (SUS304) B-63-1: Hot rolled steel plate (SPHC) ● Finish: B-1063-1: Plain B-63-1: Zinc plating chromate treatment (MFZn-C) ● Door mass when using two pcs vertically (reference): 50kg
Specific use	● Large distribution boards, cubicles and control boards
Remarks	● E-shaped retaining ring is not included. ● Conforming E-shaped retaining ring is indicated in picture diagram. See B-1024 on page 760. ● See page 716 for an example of installation.



B-1063-2

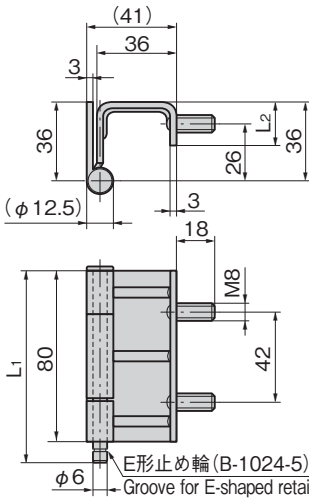

取付け方法 Installation method



商品番号 Product No.	RoHS10	L1	L2	製品質量(g) Mass	コード Code
B-1063-2	●	87	20	275	10663
B-63-2	●	85	21		10160

●:RoHS10指令対応品　▲:RoHS10指令に対応可能です。

特徴 Feature

- 筐体側のヒンジにスタッドが立っており取付けが簡単です。
- Hinge on the case side has studs so it's easy to install.

仕様	● 材　質: B-1063-2／ステンレス鋼板(SUS304) B-63-2／熱間圧延鋼板(SPHC) ● 表面仕上: B-1063-2／生地 B-63-2／亜鉛めっきクロメート処理(MFZn-C) ● 縦2ヶ使用時参考扉質量:35kg
用途	● 配電盤・キュービクル・制御盤
納期	● 標準在庫品
備考	● E形止め輪は付属されておりません。 ● 適合するE形止め輪は図内に記載しております。 B-1024(760ページ)をご参照ください。 ● 取付け参考例は716ページをご参照ください。

Specifications	● Material: B-1063-2: Stainless steel plate (SUS304) B-63-2: Hot rolled steel plate (SPHC) ● Finish: B-1063-2: Plain B-63-2: Zinc plating chromate treatment (MFZn-C) ● Door mass when using two pcs vertically (reference): 35kg
Specific use	● Distribution boards, cubicles and control boards
Remarks	● E-shaped retaining ring is not included. ● Conforming E-shaped retaining ring is indicated in picture diagram. See B-1024 on page 760. ● See page 716 for an example of installation.

B-1063-3

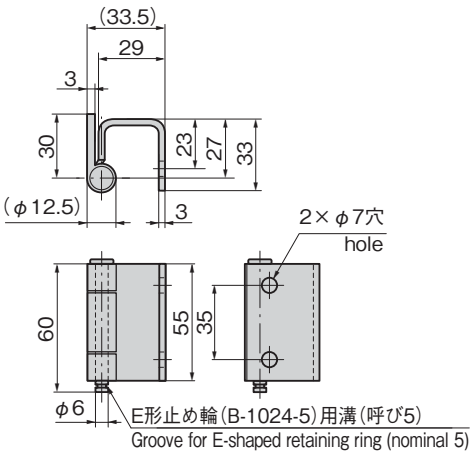

作動図 Operation drawing



商品番号 Product No.	RoHS10	製品質量(g) Mass	コード Code
B-1063-3	●	170	10664
B-63-3	●		10161

●:RoHS10指令対応品　▲:RoHS10指令に対応可能です。

特徴 Feature

- 軸が抜差し可能で取付けが簡単です。
- It's slip-joint type so installation is simple.

仕様	● 材　質: B-1063-3／ステンレス鋼板(SUS304) B-63-3／熱間圧延鋼板(SPHC) ● 表面仕上: B-1063-3／生地 B-63-3／亜鉛めっきクロメート処理(MFZn-C) ● 縦2ヶ使用時参考扉質量:25kg
用途	● 配電盤・キュービクル・制御盤
納期	● 標準在庫品
備考	● E形止め輪は付属されておりません。 ● 適合するE形止め輪は図内に記載しております。 B-1024(760ページ)をご参照ください。 ● 取付け参考例は716ページをご参照ください。

Specifications	● Material: B-1063-3: Stainless steel plate (SUS304) B-63-3: Hot rolled steel plate (SPHC) ● Finish: B-1063-3: Plain B-63-3: Zinc plating chromate treatment (MFZn-C) ● Door mass when using two pcs vertically (reference): 25kg
Specific use	● Distribution boards, cubicles and control boards
Remarks	● E-shaped retaining ring is not included. ● Conforming E-shaped retaining ring is indicated in picture diagram. See B-1024 on page 760. ● See page 716 for an example of installation.

¥ 価格はタキゲンHPまたはページ番号の上部にある2次元コードよりご確認ください