制御盤の内扉に最適
Ideal for inner doors of control panels

B-76-1　B-76-11　B-76-4　B-76-14

特徴　Feature

- 配電盤・分電盤の中板(化粧板)の高さを自由に調節できます。
- ヒンジピンが抜差しタイプで中板(化粧板)の取外しが可能です。
- テーパーの付いたローレット受けで、スムーズにローレットを呼込みます。(B-76-11～15)

- To freely adjust the height of the inside plate (dressing plate) for the power/distribution boards.
- Hinge pin is an inserted/removed type so the middle plate (dressing plate) can be removed.
- Knurling catch is tapered so the knurl can be put in smoothly. (B-76-11 to 15)

仕様	●材　　質：冷間圧延鋼板(SPCC) ●表面仕上：亜鉛めっきクロメート処理(MFZn-C)
用途	●配分電盤・制御盤・点検口
納期	●標準在庫品
備考	●ローレットつまみはA-176-47またはA-1176-47(638ページ)をご使用ください。 ●E形止め輪は付属しておりません。(760ページ) ●適合するE形止め輪は図内に記載しております。 ●L形ヒンジピンも製作します。

Specifications	●Material: Cold rolled steel plate (SPCC) ●Finish: Zinc plating chromate treatment (MFZn-C)
Specific-use	●Power/distribution and control boards and inspection entrance
Remarks	●For knurling knobs, use the A-176-47 or A-1176-47(on page 638). ●E-shaped retaining ring is not included. (on page 760) ●Conforming E-shaped retaining ring is indicated in picture diagram.

〔B-76-1～5〕

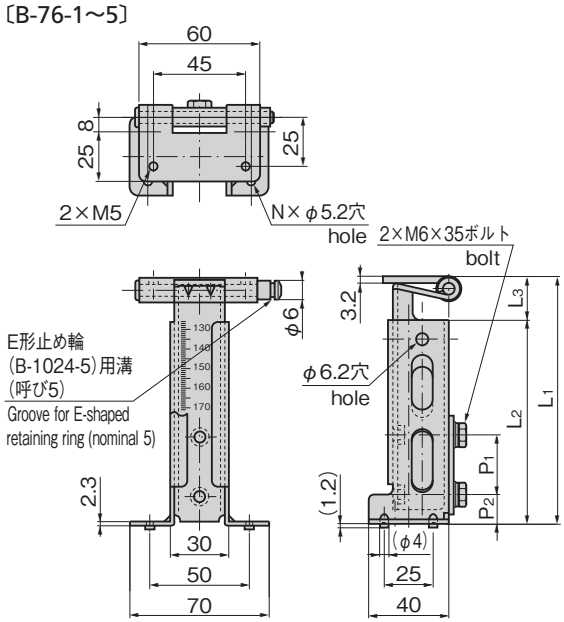

〔B-76-11～15〕

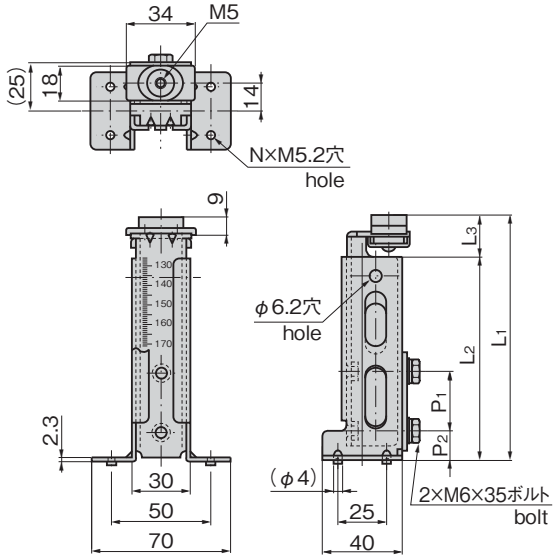

パネル穴明け寸法
Panel drilling dimensions



使用例
Example of application

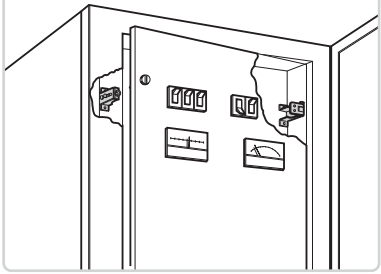

商品番号 Product No.	RoHS 10	備考 Remarks	L1	L2	L3	P1	P2	N	製品質量(g) Mass	コード Code
B-76-1		ヒンジ Hinges	171～243	149	22	40	20	4	512	11626
B-76-2			126～171	104		30	15	4	412	11627
B-76-3			96～126	74		20	12	2	342	11628
B-76-4			76～96	54		15	10	2	294	11629
B-76-5			61～76	43	18	13	7.5	2	260	11630

●：RoHS10指令対応品　▲：RoHS10指令に対応可能です。

パネル穴明け寸法
Panel drilling dimensions

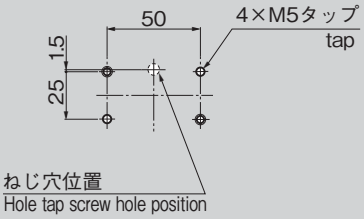

商品番号 Product No.	RoHS 10	備考 Remarks	L1	L2	L3	P1	P2	N	製品質量(g) Mass	コード Code
B-76-11		ローレット受け Knurl catch	171～243	149	22	40	20	4	446	11631
B-76-12			126～171	104		30	15	4	356	11632
B-76-13			96～126	74		20	12	2	275	11633
B-76-14			76～96	54		15	10	2	223	11634
B-76-15			61～76	43	18	13	7.5	2	192	11635

●：RoHS10指令対応品　▲：RoHS10指令に対応可能です。

¥ 価格はタキゲンHPまたはページ番号の上部にある2次元コードよりご確認ください

価格確認