

押ボタン付平面ハンドル

A-161・A-160

FLUSH HANDLES WITH PUSH-BUTTONS

A

住宅都市整備公団様指定品
 実用新案登録済 / 韓国・台湾実用新案登録済
 Specified by Juhtaku-Toshi-Seibi-Kohdan
 New design for practical use registered/New design for practical use in Korea and Taiwan registered



特徴 Feature

セキュリティアップのNo.0050キー(A-161)
 キーは360°回転で施錠時・解錠時、ともに抜き挿しできます。(A-161)
 左右兼用型(止め金を裏返すと左右の入替えができます)
 Upgraded security No.0050 key(A-161)
 Key can be taken out or put in when locked or unlocked by turning the key 360°.(A-161)
 For both left-hand and right-hand use (the left-hand or right-hand use can be changed by reversing the stopper plate)



仕様 材質:亜鉛合金(ZDC)
 表面仕上:梨地クロムめっき(MZCr)
 キー2本・ビスセット・専門止め金付属

用途 制御盤・配分電盤
 標準品・・・即納します

納期 摺動部には潤滑油をご使用下さい。
 特に塗料の付着にはご注意ください。

Specifications Material: Zinc alloy (ZDC)
 Finish: Aventurine chrome plating (MZCr)
 Accessories: Two keys, screws and special stopper plate

Specific use Control boards and power/distribution boards.
 Use lubrication oil for moving parts.
 Especially be careful of sticking coating.

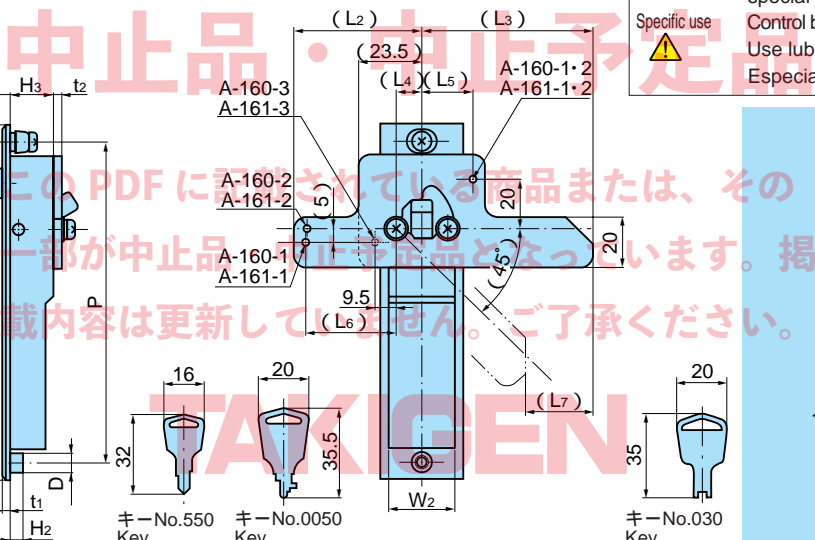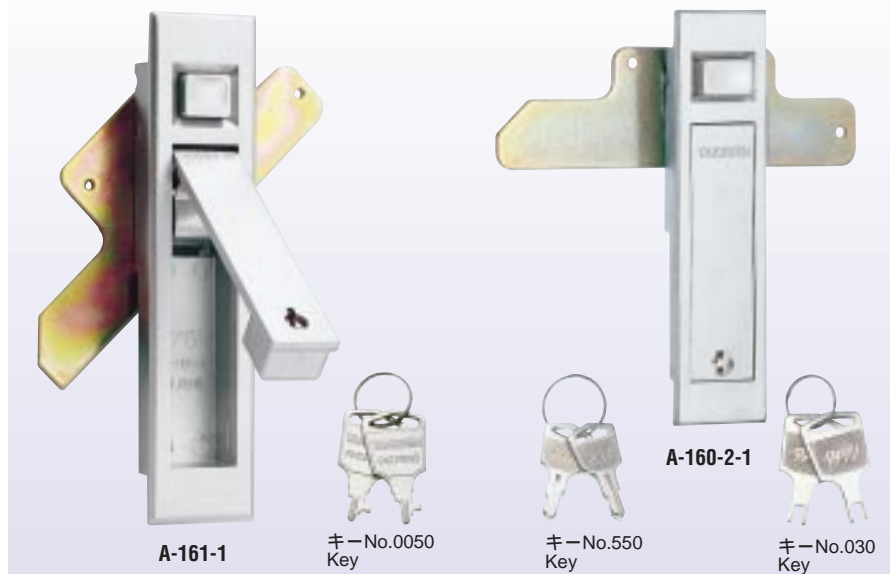

本図はA-160を基準に作図してあります。
 This drawing is based on A-160.

| 商品番号 Product No. | 鍵番号 Key No. | L1 | (L2) | (L3) | (L4) | (L5) | (L6) | (L7) | L8 | L9 | L10 | W1 | W2 | W3 | (H1) | H2 | H3 | t1 | t2 | P | D | R | 最大適用板厚 Max.applicable panel thickness | |
|---------------------|----------------|-----|------|------|------|------|------|------|----|------|------|----|----|----|------|----|----|----|-----|-----|----|-----|--|---|
| A-161-1 | 0050 | 142 | 49.5 | 65.5 | 10 | 20 | 35 | 25 | 93 | 87.5 | 117 | 32 | 26 | 27 | 68 | 5 | 17 | 3 | 3.2 | 128 | 8 | 4.5 | 2.8 | |
| A-160-1-1 | 550 | | | | | | | | | | | | | | | | | | | | | | | |
| A-161-2 | 0050 | 117 | 48.5 | 61.5 | 8.5 | 20 | 34.5 | 20 | 75 | 70.5 | 96 | 28 | 23 | 24 | 57 | 4 | 12 | 2 | 2.3 | 105 | 7 | 4 | 2 | |
| A-160-2-1 | 030 | | | | | | | | | | | | | | | | | | | | | | | |
| A-161-3 | 0050 | 84 | | 61.5 | 8.5 | | | | 20 | 42 | 37.5 | 63 | 28 | 23 | 24 | 31 | 4 | 12 | 2 | 2.3 | 72 | 7 | 4 | 2 |
| A-160-3-1 | 030 | | | | | | | | | | | | | | | | | | | | | | | |

| 商品番号 Product No. | 適用扉 Applicable door | 製品自重(g) Tare weight | コード Code | 価格 Price | 箱入数 Quantity per box |
|---------------------|------------------------|------------------------|-------------|-------------|-------------------------|
| A-161-1 | 1800 × 700 | 370 | 01256 | | |
| A-160-1-1 | | | 00352 | | |
| A-161-2 | 1000 × 500 | 200 | 01257 | | |
| A-160-2-1 | | | 00354 | | |
| A-161-3 | 600 × 500 | 150 | 01258 | | |
| A-160-3-1 | | | 00356 | | |

| 商品番号 Product No. | 備考 Remarks | コード Code | 価格 Price | 箱入数 Quantity per box |
|---------------------|---------------------|-------------|-------------|-------------------------|
| A-160-1-2 | 鍵なし without lock | 00353 | | |
| A-160-2-2 | | 00355 | | |
| A-160-3-2 | | 00357 | | |



ロングタイプの止め金も
 あります。(別売り)
 Long type stopper
 plate is optional.

| ロングタイプ 止め金寸法 (別売り) Optional long type stopper plate | 備考 Remarks | L3 |
|--|---------------|-------|
| | A-161-1用 | 100.5 |
| | A-160-1用 | |
| | A-161-2用 | 91.5 |
| | A-160-2用 | |