

C-1090
ステンレス製

C-90
亜鉛合金製



ボールキャッチ
BALL CATCHES

ボールキャッチ

ファスナー・ラッチ錠・キャッチ
錠前装置・周辺機器

ファスナー

ロータリー
ロック

ラッチ錠

DOOR CATCHES ドア
キャッチ
EV充電
サポート金具
フリーザー
周辺機器

特装車
金具

パイプ
関連金具


工業用
錠前

電磁波
対策

パッキン

250321a


ゴム脚・
クロメット

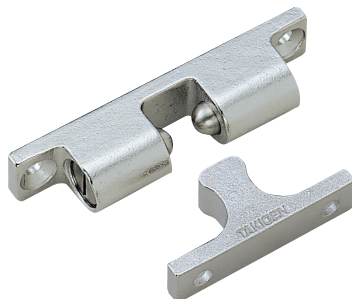


C-1090-0



C-1090-2

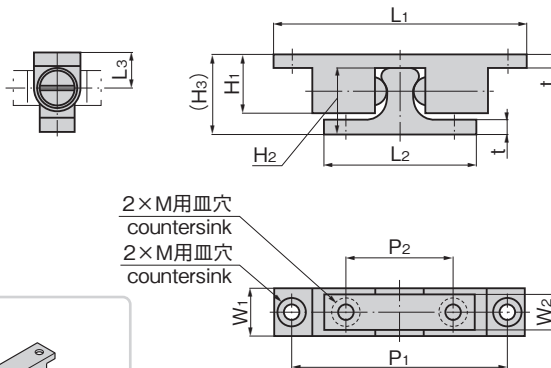

使用例
Example of
application



90° 使用も可能
can be used in the
perpendicular

特徴 Feature

- ステンレス製で耐食性に優れています。(C-1090)
- 高温、多湿に最適です。
- スムーズに抜き差しできます。
- Corrosion-resistant stainless steel is used. (C-1090)
- Suitable for high temperature and humidity area.
- Can be inserted/ removed smoothly.

[C-1090]

- | | |
|----|-------------------------|
| 仕様 | ● 材 質: ステンレス鋼铸件(SUS316) |
| | ● 表面仕上: 電解研磨 |
| 用途 | ● 環境機器・通信機器・船舶・車両 |
| 納期 | ● 標準在庫品 |

[C-90]

- | | |
|----|----------------------|
| 仕様 | ● 材 質: 亜鉛合金(ZDC) |
| | ● 表面仕上: クロムめっき(MZCr) |
| 用途 | ● 小型配分電盤・計測機械・工作機械 |
| 納期 | ● 標準在庫品 |

[C-1090]

- | | |
|----------------|---|
| Specifications | ● Material: Cast stainless steel (SUS316) |
| | ● Finish: Electrolytic polishing |
| Specific-use | ● Environment and communication equipment, ships and vehicles |

[C-90]

- | | |
|----------------|--|
| Specifications | ● Material: Zinc alloy (ZDC) |
| | ● Finish: Chrome plating (MZCr) |
| Specific-use | ● Small power/distribution boards, measuring equipment and machine tools |

商品番号 Product No.	RoHS 10+	L1	L2	L3	W1	W2	H1	H2	(H3)	t	P1	P2	M	抜き差し参考荷重N Insertion/removal load (reference)		製品質量(g) Mass	コード Code
														抜き Removal	差し Insertion		
C-1090-0	●	70	42	10.5	13	10	17	19	23	4	60	30	M4	32	32	78	23531
C-1090-1	●	50	30	7.5	10	9	12	13	16	2.5	40	20	M4	19	19	28	23532
C-1090-2	●	43	25	6	8	7.5	10	11	13.5	2.5	35	16	M3	12	12	16	23533
C-90-0	●	70	42	10.5	13	10	17	19	23	4	60	30	M4	50	50	70	20358
C-90-1	●	50	30	7.5	10	9	12	13	16	2.5	40	20	M4	18.6	27.4	25	20359
C-90-2	●	43	25	6	8	7.5	10	11	13.5	2.5	35	16	M3	8.8	19.6	15	20360

●: RoHS10指令対応品 ▲: RoHS10指令に対応可能です。