



AP-183-1




AP-183-2



裏面  
ナットは黄銅製です。  
Rear surface  
Nut is made of brass.

### パネル穴明け寸法 Panel drilling dimensions

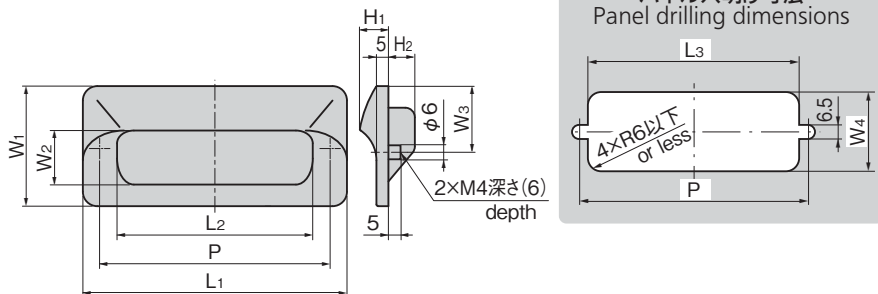

### 特徴 Feature

- 従来品A-183と同じデザインの樹脂製軽量タイプです。
- 耐塩・絶縁性があります。
- ナットは黄銅製インサート金具を使用
- Resin-made lightweight type. Same as current A-183.
- Saltwater-resistant and insulated.
- Brass-made insertion fittings are used for nuts.

### 仕様

- 材 質: PC+ABS樹脂
- 表面仕上: シボ仕上(ブラック)
- 付 属 品: ビスセット
- 適用板厚: 1.0~3.2mm

### 用途

- 小型機器・小型扉

### 納期

- 標準在庫品

### 備考



- 本製品は非結晶性樹脂材を使用していて緩み防止剤に対して適合しないため、ご使用は避けてください。(一部緩み防止剤の注意事項にも記載されております。)
- 常温でご使用ください。
- 緩み防止剤など、溶剤を使用する際は十分に検証を行ってください。

### Specifi- cations

- Material: PC+ABS resin
- Finish: Grained pattern (black)
- Accessories: Screws
- Applicable panel thickness: 1.0 to 3.2mm

### Specific use

- Small-sized equipment and doors

### Remarks



- This product uses noncrystalline resin. It is not suitable for thread-locking fluid so use should be avoided. (Also noted in the precautions of some types of thread-locking fluid.)
- Use the product in normal temperatures.
- Be sure to test adequately when using a solvent such as thread-locking fluid.

### 参考断面図 Reference cross section



商品番号 Product No.	RoHS 10	L1	L2	L3	W1	W2	W3	W4	H1	H2	P	製品質量(g) Mass	コード Code
AP-183-1-Black	●	140	108	116	64	32	33	48	12.5	11	126	53	01238
AP-183-1-Ivory	●												01350
AP-183-2-Black	●	110	82	90	50	23	26	36	12.5	11	96	39	01240
AP-183-2-Ivory	●												01351
AP-183-3-Black	●	90	62	68	44	22	22	31	11.5	11	78	24	01264
AP-183-3-Ivory	●												01352
AP-183-4-Black	●	70	42	48	38	19	19	25	11.5	9	58	18	01265
AP-183-4-Ivory	●												01353

●: RoHS10指令対応品 ▲: RoHS10指令に対応可能です。

平面  
スイング平面  
ハンドルL 型  
ハンドルロック  
ハンドルT型・丸型・  
小型ローラー  
締りフリーザー  
密閉特装密閉  
ハンドル

ラッチ式

スナッチ

リフト  
アジャスト

フック式

ポップ  
(自販機)

クレモン